


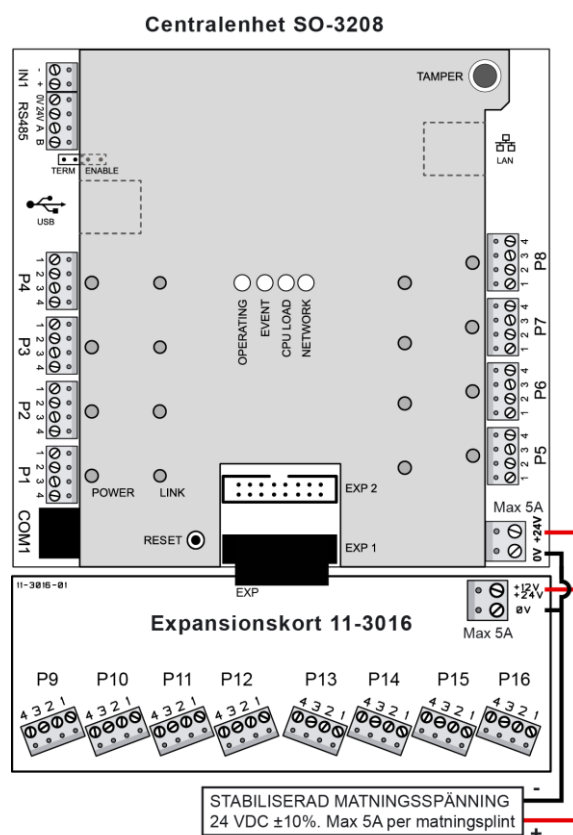

Använd bifogade skruvar för att montera expansionskortet på centralenhetens bottenplåt.

Inkoppling


EXP	Ansluts till EXP1 på centralenheten.
+24V	Ansluts till stabiliserad matningsspänning 24 VDC. Strömförbrukning max 5A.
0V	
P9 – P16	Ansluts till dörrkontrollenhet. För mer information se respektive dörrkontrollenhets installationsanvisning.
	OBS! Anslut inga RS485-slingor på dessa portar.

Tekniska data

Spänningsmatning	24 VDC
Antal utgångar	8 st

Kablage

Rekommenderad kabel till dörrkontrollenhet	ELQXB 4x2x0,5
--	---------------

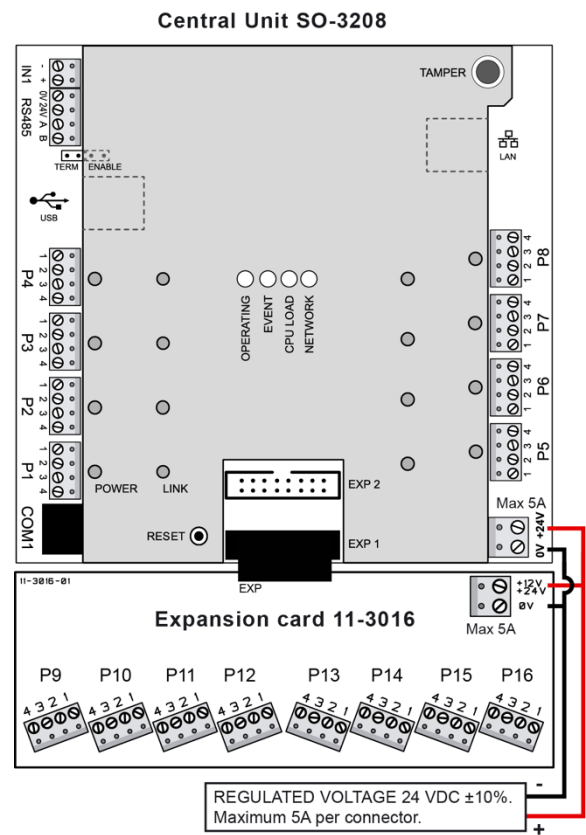

Use the enclosed screws to mount the expansion card to the base plate of the central unit.

Connections

EXP	Connects to EXP1 on the central unit.
+24V	Connects to regulated voltage 24 VDC. Power consumption max 5A.
0V	
P9 – P16	Connects to door control unit. For more information, see the installation instructions for the respective door control unit.
	NOTE: Do not connect any RS485 loops to these ports.

Technical data

Supply voltage	24 VDC
Number of outputs	8

Cabling

Recommended cable for door controll unit	ELQXB 4x2x0,5
--	---------------