

SO-3394

Inkoppling

	0V
	+12V
	--
	CLK
	Data


Tekniska data

Spänningsmatning	12 VDC
Temperaturområde	-30°C till +60°C
Mått (BxHxD)	110x145x23,8mm

Kablage

Rekommenderad kabel	ELQXB 4x2x0,5
Ledningsavstånd till dörrkontrollenhet	30 m
Dubbla ledare för 0V respektive 12V rekommenderas.	

Kortläsaren har en uppstartstid på ca 25 sekunder då lysdioderna blinkar.
Kortläsaren ska monteras på vägg eller annan slät yta. Vid montage på annat sätt ska eventuella kabelgenomföringar tätas.

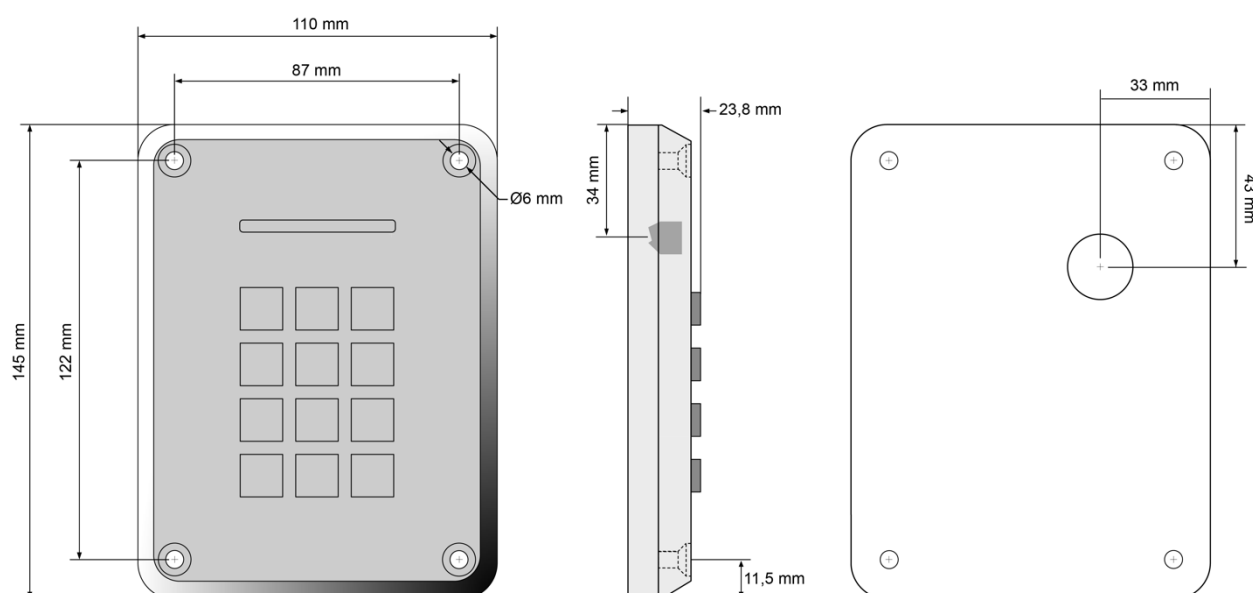

Rekommenderad hålbild vid montage.

SO-3394

Connection

	0V
	+12V
	--
	CLK
	Data


Technical data

Supply voltage	12 VDC
Temperature range	-30°C to +60°C
Size (WxHxD)	110x145x23,8mm

Cabling

Recommended cable type	ELLXB 2x3x0,5
Cable length to door controller	30 m
Double wires for 0V and 12V are recommended.	

The card reader has a start-up time of approximately 25 seconds during which the LEDs flash. The card reader should be mounted on a wall or other smooth surface. If mounted in another way, any cable entries should be sealed.

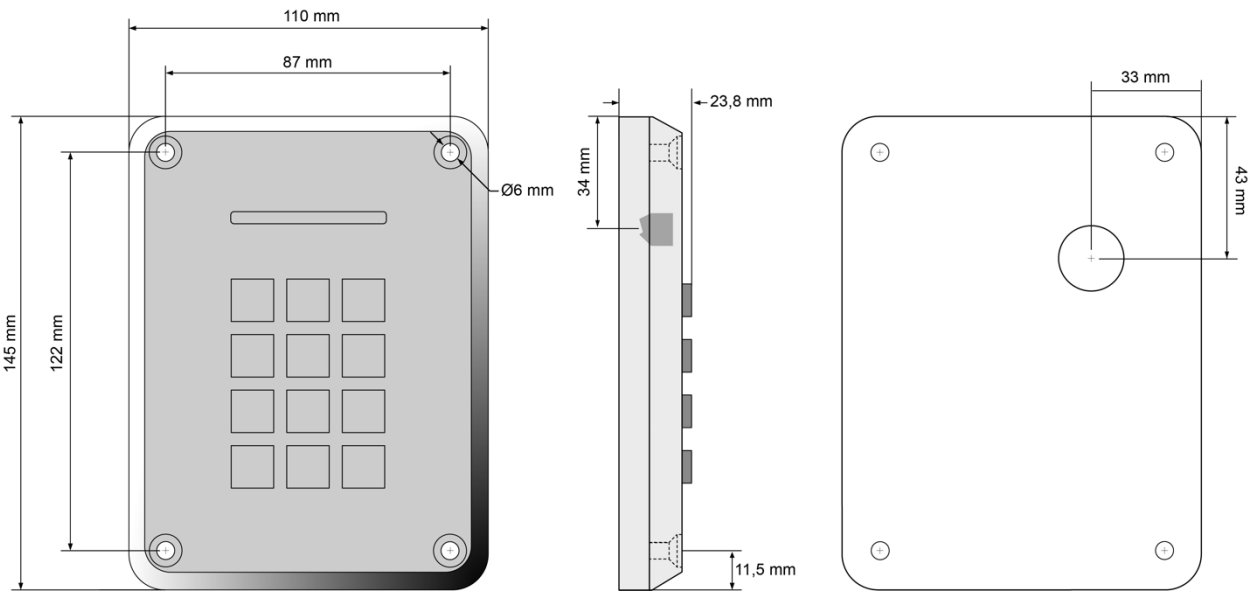

Recommended hole pattern for installation