

Förnyelse av certifikat för proxy-tjänst i centralenhet


Detta dokument berör de centralenheter som har varit uppkopplade till proxy-tjänsten men gått offline för att certifikatet för integrationen behöver förnyas. Förnyelse av certifikatet kan inte utföras via proxytjänsten.

För att förnya certifikatet i centralenheten måste man vara inloggad med användare **system** eller kombinationen **admin+system**.

Gå till menyn **System Integration** och välj **smartONE Proxy**.


Kontrollera att integrationen är aktiverad och att fälten för **Customer** och **ProxyKey** är ifyllda.

Nedan är ett exempel på hur det kan se ut.

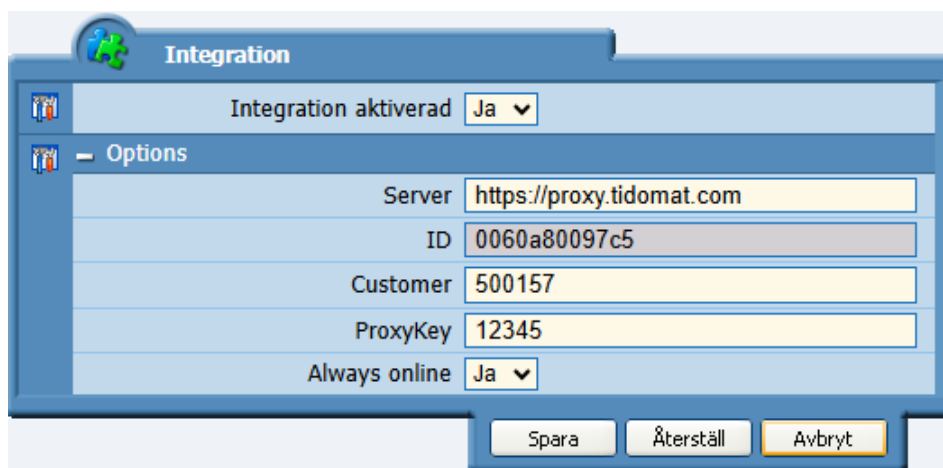

The screenshot shows a dialog box titled "Integration". At the top, it says "Integration aktiverad" with a dropdown menu set to "Ja". Below this is a section labeled "Options" containing several input fields: "Server" with the value "https://proxy.tidomat.com", "ID" with "0060a80097c5", "Customer" with "500157", "ProxyKey" with "12345", and "Always online" with a dropdown set to "Ja". At the bottom right of the dialog are three buttons: "Spara", "Återställ", and "Avbryt".

För att uppdatera certifikatet räcker det med att klicka på **Spara** var på nedanstående meddelande visas.

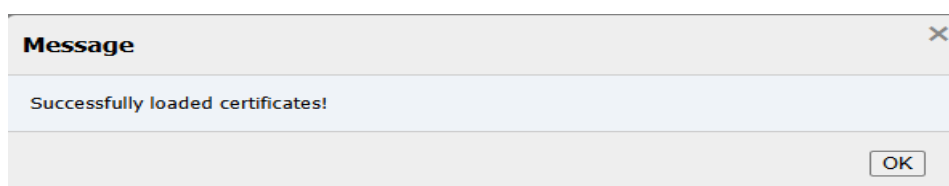

The screenshot shows a message dialog box with the title "Message" and a close button (X). The message text inside says "Successfully loaded certificates!". At the bottom right is an "OK" button.

På **Hem-sidan** under System status kan man sedan se att smartONE proxy nu är Online.

SSL/TLS Certificate	2024-12-19 To 2038-01-15
Internet connection	Yes
smartONE proxy	Online
Spänning ?	26.3 Volt (26.2 - 26.8 Volt)